



Office de la propriété  
intellectuelle  
du Canada

Un organisme  
d'Industrie Canada

Canadian  
Intellectual Property  
Office

An Agency of  
Industry Canada


*Bureau canadien  
des brevets  
Certification*

*Canadian Patent  
Office  
Certification*

La présente atteste que les documents  
ci-joints, dont la liste figure ci-dessous,  
sont des copies authentiques des docu-  
ments déposés au Bureau des brevets.

This is to certify that the documents  
attached hereto and identified below are  
true copies of the documents on file in  
the Patent Office.

Specification and Drawing, as originally filed, with Application for Patent Serial No:  
2,409,429, on October 17, 2002, by BAYER INC., assignee of Fred Guerin, Ezio  
Campomizzi, Lorenzo Ferrari, Janet N. Gamlin, Richard Pazur and Carl Walter Von  
Hellens, for "Hydrogenated Nitrile Rubber Composites with Improved Processability".

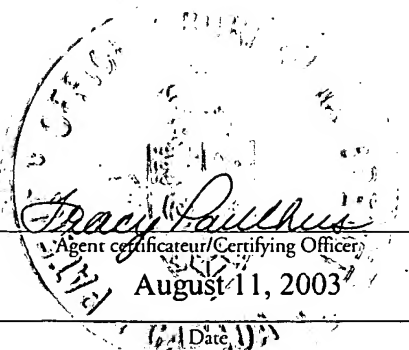  
*Tracy Paulhus*  
Agent certificateur/Certifying Officer  
August 11, 2003  
(Date)

Canada

(CIPQ 68)  
04-09-02

OPIC  CIPO

POS 1114 CA

**Abstract**

The present invention relates to polymer composites comprising at least one, optionally hydrogenated, nitrile rubber polymer having a Mooney viscosity (ML 1+4 @ 100°C) in the range of from 50-30 at least one filler and optionally at least one cross-linking agent, a process for preparing said polymer composite wherein at least one, optionally hydrogenated, nitrile rubber polymer having a Mooney viscosity (ML 1+4 @ 100°C) in the range of from 50-30, at least one filler and optionally at least one cross-linking agent are mixed and a process for the manufacture of a shaped article comprising the step of injection molding a polymer composite comprising at least one, optionally hydrogenated, nitrile rubber polymer having a Mooney viscosity (ML 1+4 @ 100°C) in the range of from 50-30, at least one filler and at least one cross-linking agent.

POS 1114 CA

## Hydrogenated Nitrile Rubber Composites with Improved Processability

### Field of the Invention.

The present invention relates to polymer composites comprising at least one, optionally hydrogenated, nitrile rubber polymer having a Mooney viscosity (ML 1+4 @ 100°C) in the range of from 50-30, at least one filler and optionally at least one cross-linking agent, a process for preparing said polymer composite wherein at least one nitrile rubber polymer having a Mooney viscosity (ML 1+4 @ 100°C) in the range of from 50-30, at least one filler and optionally at least one cross-linking agent are mixed and a process for the manufacture of a shaped article comprising the step of injection molding a polymer composite comprising at least one nitrile rubber polymer having a Mooney viscosity (ML 1+4 @ 100°C) in the range of from 50-30, at least one filler and at least one cross-linking agent.

15

### Background of the Invention

Hydrogenated nitrile rubber (HNBR), prepared by the selective hydrogenation of acrylonitrile-butadiene rubber (nitrile rubber; NBR, a copolymer comprising at least one conjugated diene, at least one unsaturated nitrile and optionally further comonomers), is a specialty rubber which has very good heat resistance, excellent ozone and chemical resistance, and excellent oil resistance. Coupled with the high level of mechanical properties of the rubber (in particular the high resistance to abrasion) it is not surprising that NBR and HNBR have found widespread use in the automotive (seals, hoses, bearing pads) oil (stators, well head seals, valve plates), electrical (cable sheathing), mechanical engineering (wheels, rollers) and shipbuilding (pipe seals, couplings) industries, amongst others.

Commercially available HNBR has a Mooney viscosity in the range of from 55 to 105, a molecular weight in the range of from 200,000 to 500,000 g/mol, a polydispersity greater than 3.0 and a residual double bond (RDB) content in the range of from 1 to 18% (by IR spectroscopy).

POS 1114 CA

One limitation in processing HNBR is the relatively high Mooney Viscosity. In principle, HNBR having a lower molecular weight and lower Mooney viscosity would have better processability. Attempts have been made to reduce the molecular weight of the polymer by mastication (mechanical breakdown) and by chemical means (for example, using strong acid), but such methods have the disadvantages that they result in the introduction of functional groups (such as carboxylic acid and ester groups) into the polymer, and the altering of the microstructure of the polymer. This results in disadvantageous changes in the properties of the polymer. In addition, these types of approaches, by their very nature, produce polymers having a broad molecular weight distribution.

A hydrogenated nitrile rubber having a low Mooney and improved processability, but which has the same microstructure as those rubbers which are currently available, is difficult to manufacture using current technologies. The hydrogenation of NBR to produce HNBR results in an increase in the Mooney viscosity of the raw polymer. This Mooney Increase Ratio (MIR) is generally around 2, depending upon the polymer grade, hydrogenation level and nature of the feedstock. Furthermore, limitations associated with the production of NBR itself dictate the low viscosity range for the HNBR feedstock. Currently, one of the lowest Mooney viscosity products available is Therban® VP KA 8837 (available from Bayer), which has a Mooney viscosity of 55 (ML 1+4 @ 100°C) and a RDB of 18%.

Co-pending applications CA-2,351,961, CA-2,357,470, CA 2,350,280 and CA 2,357,465 disclose a low-Mooney HNBR and a method for producing said low-Mooney HNBR. While the disclosed HNBR being perfectly suitable for the present invention, said applications are silent about polymer composites comprising said low-Mooney HNBR and methods of producing shaped articles from said low- HNBR.

### 30 Summary of the Invention

In one of it's aspects, the present invention relates to a polymer composite comprising at least one, optionally hydrogenated, nitrile rubber polymer ("NBR" or "HNBR" if hydrogenated) having a Moon y viscosity (ML

POS 1114 CA

1+4 @ 100°C) in the range of from 50-30 and a residual double bond (RDB) content in the range of from 1 to 18% (by IR spectroscopy), at least one filler and optionally at least one cross-linking agent. It is preferred that the NBR is fully or partially hydrogenated ("HNBR"). In particular, the invention relates to  
5 polymer composites comprising at least one, optionally hydrogenated, nitrile rubber polymer having a Mooney viscosity (ML 1+4 @ 100°C) in the range of 50-30, preferably below 45, more preferably below 40.

In another one of its aspects, the present invention relates to a process for the manufacture of a shaped article comprising the step of injection molding  
10 a polymer composite comprising at least one, optionally hydrogenated, nitrile rubber polymer having a Mooney viscosity (ML 1+4 @ 100°C) in the range of from 50-30, at least one filler and at least one cross-linking agent.

Yet another aspect of the invention a shaped article, such as a seal, hose, bearing pad, stator, well head seal, valve plate, cable sheathing, wheel,  
15 roller, pipe seal or footwear component prepared by injection molding and subsequent curing of a polymer composite comprising at least one, optionally hydrogenated, nitrile rubber polymer having a Mooney viscosity (ML 1+4 @ 100°C) in the range of from 50-30, at least one filler and optionally at least one cross-linking agent.

20

### Description of the Invention

As used throughout this specification, the term "nitrile polymer" or NBR is intended to have a broad meaning and is meant to encompass a copolymer having repeating units derived from at least one conjugated diene, at least one  
25 alpha,beta-unsaturated nitrile and optionally further one or more copolymerizable monomers.

The conjugated diene may be any known conjugated diene, in particular a C<sub>4</sub>-C<sub>6</sub> conjugated diene. Preferred conjugated dienes are butadiene, isoprene, piperylene, 2,3-dimethyl butadiene and mixtures thereof. Even more  
30 preferred C<sub>4</sub>-C<sub>6</sub> conjugated dienes are butadiene, isoprene and mixtures thereof. The most preferred C<sub>4</sub>-C<sub>6</sub> conjugated diene is butadiene.

POS 1114 CA

The alpha,beta-unsaturated nitrile may be any known alpha,beta-unsaturated nitrile, in particular a C<sub>3</sub>-C<sub>5</sub> alpha,beta-unsaturated nitrile. Preferred C<sub>3</sub>-C<sub>5</sub> alpha,beta-unsaturated nitriles are acrylonitrile, methacrylonitrile, ethacrylonitrile and mixtures thereof. The most preferred C<sub>3</sub>-C<sub>5</sub> alpha,beta-unsaturated nitrile is acrylonitrile.

Preferably, the copolymer comprises in the range of from 40 to 85 weight percent of repeating units derived from one or more conjugated dienes and in the range of from 15 to 60 weight percent of repeating units derived from one or more unsaturated nitriles. More preferably, the copolymer comprises in the range of from 60 to 75 weight percent of repeating units derived from one or more conjugated dienes and in the range of from 25 to 40 weight percent of repeating units derived from one or more unsaturated nitriles. Most preferably, the copolymer comprises in the range of from 60 to 70 weight percent of repeating units derived from one or more conjugated dienes and in the range of from 30 to 40 weight percent of repeating units derived from one or more unsaturated nitriles.

Optionally, the copolymer may further comprise repeating units derived from one or more copolymerizable monomers, such as unsaturated carboxylic acids. Non-limiting examples of suitable unsaturated carboxylic acids are fumaric acid, maleic acid, acrylic acid, methacrylic acid and mixtures thereof. Repeating units derived from one or more copolymerizable monomers will replace either the nitrile or the diene portion of the nitrile rubber and it will be apparent to the skilled in the art that the above mentioned figures will have to be adjusted to result in 100 weight percent. In case of the mentioned unsaturated carboxylic acids, the nitrile rubber preferably comprises repeating units derived from one or more unsaturated carboxylic acids in the range of from 1 to 10 weight percent of the rubber, with this amount displacing a corresponding amount of the conjugated diolefin.

Other preferred optionally further monomers are unsaturated mono- or di-carboxylic acids or derivatives thereof (e.g., esters, amides and the like) including mixtures thereof.

Hydrogenated in this invention is preferably understood to mean that at least 50 % of the residual double bonds (RDB) present in the starting nitrile

POS 1114 CA

polymer/NBR being hydrogenated, preferably more than 90 % of the RDB are hydrogenated, more preferably more than 95 % of the RDB are hydrogenated and most preferably more than 99 % of the RDB are hydrogenated.

5 The Mooney viscosity of the rubber was determined using ASTM test D1646.

The inventive polymer composite comprises at least one HNBR having a Mooney viscosity (ML 1+4 @ 100°C according to ASTM test D1646) of in the range of from 50-30, in particular in the range of from 45-30, preferably in the range of from 40-30.


10 It is preferred that the low-Mooney, optionally hydrogenated NBR of this invention has a polydispersity index of less than 3, more preferred less than 2.9, even more preferred less than 2.8, even more preferred less than 2.7, even more preferred less than 2.6, even more preferred less than 2.5, even more preferred less than 2.4, even more preferred less than 2.3, and even  
15 more preferred less than 2.2.

The present invention is not restricted to a special process for preparing the, optionally hydrogenated, NBR. However, the NBR and HNBR of the invention is readily available in a two step synthesis as disclosed in CA-2,351,961, CA-2,357,470, CA 2,350,280 and CA 2,357,465, which may take  
20 place in the same reaction set-up or different reactors. For jurisdictions allowing for this procedure, CA-2,351,961, CA-2,357,470, CA 2,350,280 and CA 2,357,465 are incorporated herein by reference.

#### ***Step 1: Metathesis***

25 The metathesis reaction is conducted in the presence of one or more compounds of the general formulas I, II, III or IV;

POS 1114 CA



Formula I


wherein:

M is Os or Ru,

R and R<sup>1</sup> are, independently, hydrogen or a hydrocarbon selected from the group consisting of C<sub>2</sub>-C<sub>20</sub> alkenyl, C<sub>2</sub>-C<sub>20</sub> alkynyl, C<sub>1</sub>-C<sub>20</sub> alkyl, aryl, C<sub>1</sub>-C<sub>20</sub> carboxylate, C<sub>1</sub>-C<sub>20</sub> alkoxy, C<sub>2</sub>-C<sub>20</sub> alkenyloxy, C<sub>2</sub>-C<sub>20</sub> alkynyloxy, aryloxy, C<sub>2</sub>-C<sub>20</sub> alkoxycarbonyl, C<sub>1</sub>-C<sub>20</sub> alkylthio, C<sub>1</sub>-C<sub>20</sub> alkylsulfonyl and C<sub>1</sub>-C<sub>20</sub> alkylsulfinyl,

X and X<sup>1</sup> are independently any anionic ligand, and

L and L<sup>1</sup> are independently any neutral ligand, such as phosphines, amines, thioethers or imidazolidinylidene (which are especially preferred) or any neutral carbene, optionally, L and L<sup>1</sup> can be linked to one another to form a bidentate neutral ligand;

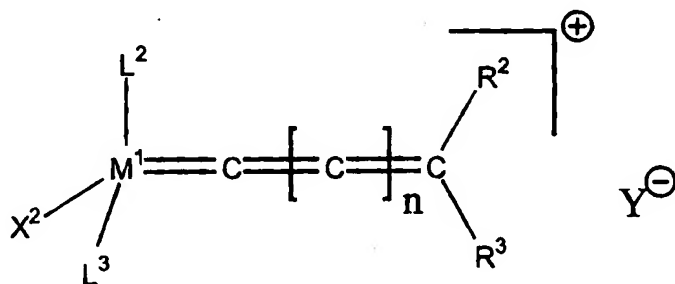

Formula II

wherein:

M<sup>1</sup> is Os or Ru;

R<sup>2</sup> and R<sup>3</sup> are, independently, hydrogen or a hydrocarbon selected from the group consisting of C<sub>2</sub>-C<sub>20</sub> alkenyl, C<sub>2</sub>-C<sub>20</sub> alkynyl, C<sub>1</sub>-C<sub>20</sub> alkyl, aryl, C<sub>1</sub>-C<sub>20</sub> carboxylate, C<sub>1</sub>-C<sub>20</sub> alkoxy, C<sub>2</sub>-C<sub>20</sub> alkenyloxy, C<sub>2</sub>-C<sub>20</sub> alkynyloxy, aryloxy, C<sub>2</sub>-



POS 1114 CA

C<sub>20</sub> alkoxycarbonyl, C<sub>1</sub>-C<sub>20</sub> alkylthio, C<sub>1</sub>-C<sub>20</sub> alkylsulfonyl and C<sub>1</sub>-C<sub>20</sub> alkylsulfinyl,


X<sup>2</sup> is a anionic ligand, and

5 L<sup>2</sup> is a neutral π-bonded ligand, independent of whether they are mono- or polycyclic,

L<sup>3</sup> is a ligand selected from the group consisting of phosphines, sulfonated phosphines, fluorinated phosphines, functionalized phosphines bearing up to three aminoalkyl-, ammoniumalkyl-, alkoxyalkyl-, alkoxycarbonylalkyl-, hydroxycarbonylalkyl-, hydroxyalkyl- or ketoalkyl- groups,  
10 phosphites, phosphinites, phosphonites, phosphinamines, arsines, stibenes, ethers, amines, amides, imines, sulfoxides, thioethers and pyridines,

Y<sup>-</sup> is a non-coordinating anion,

n is an integer in the range of from 0 to 5;




Formula III

15 wherein

M<sup>2</sup> is Mo or W,

R<sup>4</sup> and R<sup>5</sup> are, independently, hydrogen or a hydrocarbon selected from the group consisting of C<sub>2</sub>-C<sub>20</sub> alkenyl, C<sub>2</sub>-C<sub>20</sub> alkynyl, C<sub>1</sub>-C<sub>20</sub> alkyl, aryl, C<sub>1</sub>-C<sub>20</sub> carboxylate, C<sub>1</sub>-C<sub>20</sub> alkoxy, C<sub>2</sub>-C<sub>20</sub> alkenyloxy, C<sub>2</sub>-C<sub>20</sub> alkynyloxy, aryloxy, C<sub>2</sub>-  
20 C<sub>20</sub> alkoxycarbonyl, C<sub>1</sub>-C<sub>20</sub> alkylthio, C<sub>1</sub>-C<sub>20</sub> alkylsulfonyl and C<sub>1</sub>-C<sub>20</sub> alkylsulfinyl,



Formula VI

POS 1114 CA

$R^6$  and  $R^7$  are independently selected from any unsubstituted or halo-substituted alkyl, aryl, aralkyl groups or silicon-containing analogs thereof, wherein:

M is Os or Ru,

5        R and  $R^1$  are independently selected from the group consisting of hydrogen, substituted or unsubstituted alkyl, and substituted or unsubstituted alkyl,

X and  $X^1$  are independently any anionic ligand, and

10        L and  $L^1$  are independently any neutral ligand, such as phosphines, amines, thioethers or imidazolidinylidene (which are especially preferred) or any neutral carbene, optionally, L and  $L^1$  can be linked to one another to form a bidentate neutral ligand;

15        Compounds of Formula I are preferred. Compounds of Formula I wherein L and  $L^1$  are trialkylphosphines or imidazolidinylidene, X and  $X^1$  are chloride ions and M is Ruthenium are even more preferred.

The amount of compounds will depend upon the nature and catalytic activity of the compound(s) in question. Typically, the ratio of compound(s) to NBR is in the range of from 0.005 to 5, preferably in the range of from 0.025 to 1 and, more preferably, in the range of from 0.1 to 0.5.

20        The metathesis reaction is carried out in the presence of a co-olefin which is preferably a  $C_2$  to  $C_{16}$  linear or branched olefin such as ethylene, isobutene, styrene or 1-hexene. Where the co-olefin is a liquid (such as 1-hexene), the amount of co-olefin employed is preferably in the range of from 1 to 200 weight %. Where the co-olefin is a gas (such as ethylene) the amount  
25        of co-olefin employed is such that it results in a pressure in the reaction vessel in the range of from  $1 \times 10^5$  Pa to  $1 \times 10^7$  Pa, preferably in the range of from  $5.2 \times 10^5$  Pa to  $4 \times 10^6$  Pa.

The metathesis reaction can be carried out in any suitable solvent which does not inactivate the catalyst or otherwise interfere with the reaction.

30        Preferred solvents include, but are not limited to, dichloromethane, benzene, toluene, tetrahydrofuran, cyclohexane and the like. The most preferred solvent is monochlorobenzene (MCB). In certain cases the co-olefin can itself act as a solvent (for example, 1-hexene), in which case no other solvent is necessary.

POS 1114 CA

The concentration of nitrile polymer (NBR) in the reaction mixture is not critical but, obviously, should be such that the reaction is not hampered if the mixture is too viscous to be stirred efficiently, for example. Preferably, the concentration of NBR is in the range of from 1 to 20% by weight, most preferably in the range of from 6 to 15% by weight.

The metathesis reaction is carried out at a temperature in the range of from 20 to 140°C; preferably in the range of from 60 to 120°C.

The reaction time will depend upon a number of factors, including cement concentration, amount of catalyst used and the temperature at which the reaction is performed. The metathesis is usually complete within the first two hours under typical conditions. The progress of the metathesis reaction may be monitored by standard analytical techniques, for example using GPC or solution viscosity. Whenever referenced throughout the specification the molecular weight distribution of the polymer was determined by gel permeation chromatography (GPC) using a Waters 2690 Separation Module and a Waters 410 Differential Refractometer running Waters Millenium software version 3.05.01. Samples were dissolved in tetrahydrofuran (THF) stabilized with 0.025% BHT. The columns used for the determination were three sequential mixed-B gel columns from Polymer Labs. Reference Standards used were polystyrene standards from American Polymer Standards Corp.

### **Step 2: Hydrogenation**

After the metathesis reaction, the nitrile polymer must be hydrogenated to result in a partially or fully hydrogenated nitrile polymer (HNBR). HNBR are preferred in the present invention. Reduction of the product from the metathesis reaction can be effected using standard reduction techniques known in the art. For example, homogeneous hydrogenation catalysts known to those of skill in the art, such as Wilkinson's catalyst  $\{(PPh_3)_3RhCl\}$  and the like can be used.

The hydrogenation may be performed *in situ* i.e. in the same reaction vessel in which the metathesis step is carried out, without the need to first isolate the metathesised product. The hydrogenation catalyst is simply added to the vessel, which is then treated with hydrogen to produce the HNBR.

POS 1114 CA

Grubb's catalyst, in the presence of hydrogen, is converted to a dihydride complex  $(PR_3)_2RuCl_2H_2$ , which is itself an olefin hydrogenation catalyst. Thus, in a favorable one-pot reaction, Grubb's catalyst was used to reduce the molecular weight of NBR in the presence of co-olefin. The reaction mixture was then treated with hydrogen, converting the Grubb's complex to the dihydride species which then hydrogenated the metathesis product to produce the HNBR of the invention. The rate of hydrogenation was lower in this case than in the case where Wilkinson's catalyst was used for the hydrogenation step, but it is clear that such an approach is indeed a viable one.

The low Mooney HNBR which forms a preferred component of the polymer composite of the invention can be characterized by standard techniques known in the art. For example, the molecular weight distribution of the polymer was determined by gel permeation chromatography (GPC) using a Waters 2690 Separation Module and a Waters 410 Differential Refractometer running Waters Millennium software version 3.05.01. Samples were dissolved in tetrahydrofuran (THF) stabilized with 0.025% BHT. The columns used for the determination were three sequential mixed-B gel columns from Polymer Labs. Reference Standards used were polystyrene standards from American Polymer Standards Corp.

The inventive polymer composite further comprises at least one filler. The filler may be an active or an inactive filler or a mixture thereof. The filler may be in particular:

- highly dispersed silicas, prepared e.g. by the precipitation of silicate solutions or the flame hydrolysis of silicon halides, with specific surface areas of in the range of from 5 to 1000 m<sup>2</sup>/g, and with primary particle sizes of in the range of from 10 to 400 nm; the silicas can optionally also be present as mixed oxides with other metal oxides such as those of Al, Mg, Ca, Ba, Zn, Zr and Ti;
- synthetic silicates, such as aluminum silicate and alkaline earth metal silicate like magnesium silicate or calcium silicate, with BET specific surface areas in the range of from 20 to 400 m<sup>2</sup>/g and primary particle diameters in the range of from 10 to 400 nm;
- natural silicates, such as kaolin and other naturally occurring silica;

POS 1114 CA

- glass fibers and glass fiber products (matting, extrudates) or glass microspheres;
  - metal oxides, such as zinc oxide, calcium oxide, magnesium oxide and aluminum oxide;
  - 5       - metal carbonates, such as magnesium carbonate, calcium carbonate and zinc carbonate;
  - metal hydroxides, e.g. aluminum hydroxide and magnesium hydroxide;
  - carbon blacks; the carbon blacks to be used here are prepared by  
10       the lamp black, furnace black or gas black process and have preferably BET (DIN 66 131) specific surface areas in the range of from 20 to 200 m<sup>2</sup>/g, e.g. SAF, ISAF, HAF, FEF or GPF carbon blacks;
  - rubber gels, especially those based on polybutadiene,  
15       butadiene/styrene copolymers, butadiene/acrylonitrile copolymers and polychloroprene;
- or mixtures thereof.

Examples of preferred mineral fillers include silica, silicates, clay such as bentonite, gypsum, alumina, titanium dioxide, talc, mixtures of these, and  
20       the like. These mineral particles have hydroxyl groups on their surface, rendering them hydrophilic and oleophobic. This exacerbates the difficulty of achieving good interaction between the filler particles and the rubber. For many purposes, the preferred mineral is silica, especially silica made by carbon dioxide precipitation of sodium silicate. Dried amorphous silica particles  
25       suitable for use in accordance with the invention may have a mean agglomerate particle size in the range of from 1 to 100 microns, preferably between 10 and 50 microns and most preferably between 10 and 25 microns. It is preferred that less than 10 percent by volume of the agglomerate particles are below 5 microns or over 50 microns in size. A suitable amorphous dried  
30       silica moreover usually has a BET surface area, measured in accordance with DIN (Deutsche Industrie Norm) 66131, of in the range of from 50 and 450 square meters per gram and a DBP absorption, as measured in accordance with DIN 53601, of in the range of from 150 and 400 grams per 100 grams of

POS 1114 CA

silica, and a drying loss, as measured according to DIN ISO 787/11, of in the range of from 0 to 10 percent by weight. Suitable silica fillers are available under the trademarks HiSil® 210, HiSil® 233 and HiSil® 243 from PPG Industries Inc. Also suitable are Vulkasil® S and Vulkasil® N, from Bayer AG.

5 Often, use of carbon black as a filler is advantageous. Usually, carbon black is present in the polymer composite in an amount of in the range of from 20 to 200 parts by weight, preferably 30 to 150 parts by weight, more preferably 40 to 100 parts by weight. Further, it might be advantageous to use  
10 a combination of carbon black and mineral filler in the inventive polymer composite. In this combination the ratio of mineral fillers to carbon black is usually in the range of from 0.05 to 20, preferably 0.1 to 10.

The polymer composite may advantageously further comprise other natural or synthetic rubbers such as BR (polybutadiene), ABR (butadiene/acrylic acid-C<sub>1</sub>-C<sub>4</sub>-alkylester-copolymers), CR (polychloroprene), IR  
15 (polyisoprene), SBR (styrene/butadiene-copolymers) with styrene contents in the range of 1 to 60 wt%, NBR (butadiene/acrylonitrile-copolymers with acrylonitrile contents of 5 to 60 wt%, HNBR with a Mooney viscosity (ML 1+4 @ 100°C according to ASTM test D1646) of at least 30 (partially or totally hydrogenated NBR-rubber), EPDM (ethylene/propylene/diene-copolymers),  
20 FKM (fluoropolymers or fluororubbers), and mixtures of the given polymers. Careful blending with conventional HNBR often reduces cost of the polymer composite without sacrificing the processability. The amount of conventional HNBR and/or other natural or synthetic rubbers will depend on the process condition to be applied during manufacture of shaped articles and is readily  
25 available by few preliminary experiments.

The polymer composite furthermore optionally comprises one or more cross-linking agents or curing systems. The invention is not limited to a special curing system, however, peroxide curing system are preferred. Furthermore, the invention is not limited to a special peroxide curing system. For example,  
30 inorganic or organic peroxides are suitable. Preferred are organic peroxides such as dialkylperoxides, k talperoxides, aralkylperoxides, peroxide ethers, peroxid esters, such as di-tert.-butylperoxide, bis-(tert.-butylperoxyisopropyl)-benz n , dicumylperoxide, 2,5-dimethyl-2,5-di(tert.-butylperoxy)-hexane, 2,5-

POS 1114 CA

dimethyl-2,5-di(tert.-butylperoxy)-hexene-(3), 1,1-bis-(tert.-butylperoxy)-3,3,5-trimethyl-cyclohexane, benzoylperoxide, tert.-butylcumylperoxide and tert.-butylperbenzoate. Usually the amount of peroxide in the polymer composite is in the range of from 1 to 12 phr (= per hundred rubber), preferably from 4 to 8  
 5 phr. Subsequent curing is usually performed at a temperature in the range of from 100 to 200 °C, preferably 130 to 180 °C. Peroxides might be applied advantageously in a polymer-bound form. Suitable systems are commercially available, such as Polydispersion T(VC) D-40 P from Rhein Chemie Rheinau GmbH, D (= polymerbound di-tert.-butylperoxy-isopropylbenzene).

10 The rubber composition according to the invention can contain further auxiliary products for rubbers, such as reaction accelerators, vulcanizing accelerators, vulcanizing acceleration auxiliaries, antioxidants, foaming agents, anti-aging agents, heat stabilizers, light stabilizers, ozone stabilizers, processing aids, plasticizers, tackifiers, blowing agents, dyestuffs, pigments,  
 15 waxes, extenders, organic acids, inhibitors, metal oxides, and activators such as triethanolamine, polyethylene glycol, hexanetriol, etc., which are known to the rubber industry. The rubber aids are used in conventional amounts, which depend inter alia on the intended use. Conventional amounts are e.g. from 0.1 to 50 wt.%, based on rubber. Preferably the composition comprises in the  
 20 range of 0.1 to 20 phr of an organic fatty acid as an auxiliary product, preferably a unsaturated fatty acid having one, two or more carbon double bonds in the molecule which more preferably includes 10% by weight or more of a conjugated diene acid having at least one conjugated carbon-carbon double bond in its molecule. Preferably those fatty acids have in the range of  
 25 from 8-22 carbon atoms, more preferably 12-18. Examples include stearic acid, palmitic acid and oleic acid and their calcium-, zinc-, magnesium-, potassium- and ammonium salts. Preferably the composition comprises in the range of 5 to 50 phr of an acrylate as an auxiliary product. Suitable acrylates are known from EP-A1-0 319 320, in particular p. 3, l. 16 to 35, from US-  
 30 5 208 294, in particular Col. 2, l. 25 to 40, and from US-4 983 678, in particular Col. 2, l. 45 to 62. Particular reference is made to zinc acrylate, zinc diacrylate or zinc dimethacrylate or a liquid acrylate, such as trimethylolpropanetrimethacrylate (TRIM), butanedioldimethacrylat (BDMA)

POS 1114 CA

and ethylenglycoldimethacrylate (EDMA). It might be advantageous to use a combination of different acrylates and/or metal salts thereof. Of particular advantage is often to use metal acrylates in combination with a Scorch-retarder such as sterically hindered phenols (e.g. methyl-substituted aminoalkylphenols, in particular 2,6-di-tert.-butyl-4-dimethylaminomethylphenol).

The ingredients of the final polymer composite are mixed together, suitably at an elevated temperature that may range from 25 °C to 200 °C. Normally the mixing time does not exceed one hour and a time in the range from 2 to 30 minutes is usually adequate. The mixing is suitably carried out in an internal mixer such as a Banbury mixer, or a Haake or Brabender miniature internal mixer. A two roll mill mixer also provides a good dispersion of the additives within the elastomer. An extruder also provides good mixing, and permits shorter mixing times. It is possible to carry out the mixing in two or more stages, and the mixing can be done in different apparatus, for example one stage in an internal mixer and one stage in an extruder. However, it should be taken care that no unwanted pre-crosslinking (= scorch) occurs during the mixing stage. For compounding and vulcanization see also: Encyclopedia of Polymer Science and Engineering, Vol. 4, p. 66 et seq. (Compounding) and Vol. 17, p. 666 et seq. (Vulcanization).

Due to the low viscosity of the polymer composite, the polymer composite is ideally suited to be processed by but not limited to molding injection technology. The polymer composite can also be useful to transfer molding, to compression molding, or to liquid injection molding. The polymer composite comprising a cross-linking system is usually introduced in a conventional injection molding and injected into hot (about 160-230°C) forms where the cross-linking/vulcanization takes place depending on the polymer composite composition and temperature of the mold.

The inventive polymer composite is very well suited for the manufacture of a shaped article, such as a seal, hose, bearing pad, stator, well head seal, valve plate, cable sheathing, wheel, roller, pipe seal, in place gaskets or footwear component prepared by injection molding technology.



POS 1114 CA

**EXAMPLES****Examples 1-4**

5 Bis(tricyclohexylphosphine)benzylidene ruthenium dichloride (Grubb's metathesis catalyst), 1-hexene and monochlorobenzene (MCB) were purchased from Alfa, Aldrich Chemicals, and PPG respectively and used as received.

The **metathesis** reactions were carried out in a Pilot high-pressure reactor under the following conditions:

10	Cement Concentration	6 % by weight
	Co-Olefin	Ethylene
	Co-Olefin Concentration	500 psi
	Agitator Speed	600 rpm
	Catalyst Loading	See Table 1
15	Solvent	Monochlorobenzene
	Perbunan	statistical Butadiene-acrylonitrilecopolymer with an acrylonitrile content of 34 mol% and a Mooney-Viscosity ML (1+4)@
20		100 °C of 30MU.

25 The polymer (9 kg) was dissolved in monochlorobenzene (141 kg). The reactor was heated to desired temperature and 2 L of a monochlorobenzene solution containing Grubb's catalyst was added to the reactor. The reactor was pressurized with ethylene to a pressure of 500psi. The temperature was maintained constant for the duration of the reaction. A cooling coil connected to a temperature controller and a thermal sensor was used to regulate the temperature. The progress of the reaction was monitored using solution viscosity measurements for the 6% cements.

30 The **hydrogenation** reactions were carried out in the same reactor as the metathesis under the following conditions:

C ment solid concentration	12%
H <sub>2</sub> (g) pressure	1200 psi

POS 1114 CA

	Agitator Speed	600 rpm
	Reactor Temperature	138°C
	Catalyst Loading (Wilkinson's)	See Table 1
	Triphenylphosphine	1 phr
5	Solvent	Monochlorobenzene

The cement from the metathesis reaction was degassed 3 times with H<sub>2</sub> (100 psi) under full agitation. The temperature of the reactor was raised to 130°C and a 2L monochlorobenzene solution containing Wilkinson's catalyst and triphenylphosphine was added to the reactor. The temperature was allowed to increase to 138°C and maintained constant for the duration of the reaction. The hydrogenation reaction was monitored by measuring the residual double bond (RDB) level at various intervals using IR spectroscopy.

Alternatively, the Ruthenium metathesis catalyst could be used to hydrogenate the polymer.

Table 1 :Raw Polymer Properties

	<b>Therban® A3407 as comparison</b>	<b>Therban® C3467 as comparison</b>	<b>Therban® A3907 as comparison</b>	<b>Therban® C4307 as comparison</b>
Wilkinson's Loading	N/A	N/A	N/A	N/A
ML (1+4 @ 100°C)	70	70	70	70
RDB (by IR)	<0.9%	5.5%	<0.9%	<0.9%
Mn	97000	95000	97000	87000
Mw	314000	301000	298000	290000
PDI	3.2	3.2	3.1	3.3
	<b>Ex. 1</b>	<b>Ex. 2</b>	<b>Ex. 3</b>	<b>Ex. 4</b>
Grubb's Loading				
Wilkinson's Loading	0.08 phr	0.05 phr	0.08 phr	0.08 phr
ML (1+4 @ 100°C)	38.3	32.5	39.7	34.1
RDB (by IR)	<0.9%	5.5%	<0.9%	<0.9 %
Mn	70000	72000	70000	67000
Mw	197000	172000	186000	184000
PDI	2.8	2.4	2.7	2.8

POS 1114 CA

**Examp l s 5-6: Compounding and physical testing in Peroxide Recip**

Polymer composites were mixed on an open mill. The curatives were added on a cold open mill in a separate mixing step. The formulations used in this assessment are based on a simplified peroxide recipe according to Table 2.

Carbon black N 660 Sterling-V available from Cabot Tire Blacks

Maglite® D is a MgO available from C.P. Hall.

Naugard® 445 is a diphenylamine available from Uniroyal Chemical.

10 Plasthall TOTM is a Trioctyl trimellitate available from C.P. Hall.

Vulkanox® ZMB-2/C5 is a Zinc salt of 4- and 5-methyl-mercapto benzimidazole available from Bayer AG

DIAC #7 is a Triallylisocyanurate available from DuPont Dow Elastomers

15 Vulcup 40KE is 2,2'-bis (tert-butylperoxy di-isopropylbenzene) available from Harwick Standard.

**Table 2 : Compounding Recipe**

Experiment	5	6
	(comp.)	
Therban® A3407	100	
HNBR of Example 1		100
Carbon Black, N 660 Sterling-V	50	50
Maglite® D	3	3
Naugard® 445	1	1
Vulkanox® ZMB-2/C5 (ZMMBI)	0.4	0.4
Zinc Oxide (Kadox® 920) Grade PC 216	3	3
DIAC #7	1.5	1.5
Vulcup 40KE	7.5	7.5

**Polymer Composites Properties**

20 Table 3 shows a summary of the properties of polymer composites of Exp. 5 and 6. Example 5 is for comparison. The MDR cure characteristics were at 1.7 Hz, 1°arc, 180 °C, 30 min, 100 dNm.

POS 1114 CA

**Table 3 : Summary of Polymer Composites Properties**

<b>Exempl</b>	<b>5</b>	<b>6</b>
<b>Mooney ML 1+4@100°C</b>		
- Raw Polymer	70	38
- Polymer composite	105	67
<b>MH (dN.m)</b>	57.6	47.4
<b>ML (dN.m)</b>	3.2	1.6
<b>Delta Torque (dN.m)</b>	54.5	45.8
<b>t90 (minutes)</b>	5.9	6.3
<b>100% Modulus (Mpa)</b>	8.7	7.9
<b>Ultimate Tensile (Mpa)</b>	23.8	23.3
<b>Elongation at Break (%)</b>	188	212
<b>Hardness Shore A</b>	70	68
<b>Compression Set in % after 168h @ 150°C</b>	22.88	24.24

From Table 3, it is clear that although the molecular weight (Mw) of the Low Mooney HNBR used in polymer composite 6 is only 63% of that of Therban® A3407, the physical properties remain very good.

In order to investigate the suitability for injection molding, a series of experiments were done at various pressures on a capillary PV 400 Rheovulcameter. The testing method is described in Intern. Polymer Processing III (1988) 2, pp. 86-90.

10

The results are given in Table 4.

**Table 4 Pressure vs. Filling Degree**

<b>Pressure</b>	<b>Filling Degree (%) for Composite 5</b>	<b>Filling Degree (%) for Composite 6</b>
<b>50 bar</b>	4.9	10.9
<b>75 bar</b>	11.2	24.6
<b>95 bar</b>	21.4	43

The excellent physical properties of such a low molecular weight polymer might be attributed to the narrow molecular weight distribution. The low molecular weight which is supported by a narrower MWD result in a

POS 1114 CA

favorable viscosity, which allows for injection molding processes for producing shaped articles with about the double speed compared to regular HNBR.

#### **Examples 7-10:- Compounding and physical testing in Sulfur Recipe**

- 5 Polymer composites were mixed on an open mill. The curatives were added on a cold open mill in a separate mixing step. The formulations used in this assessment are based on a simplified sulfur recipe according to Table 5.

Carbon black N 660 Sterling-V available from Cabot Tire Blacks.

- 10 Naugard® 445 is a diphenylamine available from Uniroyal Chemical.

Vulkanox® ZMB-2/C5 is a Zinc salt of 4- and 5-methyl-mercapto benzimidazole available from Bayer AG

Vulkacit CZ/EG-C is a benzothiazyl-2-cyclohexyl sulfenamide available from Bayer AG.

- 15 Vulkacit Thiuram/C is a tetramethylthiuram disulfide available from Bayer AG.

Spider Sulfur is elemental sulfur available from C.P. Hall.

**Table 5 : Compounding Recipe**

<b>Experiment</b>	<b>7 (comp.)</b>	<b>8</b>	<b>9</b>	<b>10</b>
Therban® C3467	100	70	30	0
HNBR of Example 3	0	30	70	100
Carbon Black, N 660 Sterling-V	50	50	50	50
Stearic Acid Emersol 132 NF	1	1	1	1
Naugard 445	1	1	1	1
Vulkanox ZMB-2/C5 (ZMMBI)	0.4	0.4	0.4	0.4
Zinc Oxide (Kadox 920) Grade PC 216	3	3	3	3
Spider Sulfur	0.5	0.5	0.5	0.5
Vulkacit CZ/EG-C (CBS)	0.5	0.5	0.5	0.5
Vulkacit Thiuram/c (D)	2	2	2	2

20

#### **Polymer Composites Properties**

Table 6 shows a summary of the properties of polymer composites of Exp. 7-10. Example 7 is for comparison. The MDR cure characteristics were at 1.7 Hz, 1°arc, 170 °C, 30 min, 100 dNm.

25

POS 1114 CA

**Table 6 : Summary of Polymer Composites Properties**

Example	7	8	9	10
<b>Mooney ML 1+4@100°C</b>				
- Raw Polymer	70			32.5
- Polymer composite	90.9	84.1	68.2	56.0
<b>MH (dN.m)</b>	44.4	44.2	41.7	36.2
<b>ML (dN.m)</b>	2.5	2.3	1.5	1.0
<b>Delta Torque (dN.m)</b>	41.9	42	40.2	35.2
<b>T90 (minutes)</b>	2.8	2.9	3.3	3.9
<b>100% Modulus (Mpa)</b>	3.9	4.1	3.9	3.5
<b>Ultimate Tensile (Mpa)</b>	23.97	2448	23.75	22.27
<b>Elongation at Break (%)</b>	440	456	487	512
<b>Hardness Shore A</b>	68	68	66	66
<b>Compression Set in % after 168h @ 150°C</b>	66.27	62.72	64.38	69.63

**Examples 11-12: Compounding and physical testing in blends with****5 Levapren®**

Table 7 shows a summary of the properties of polymer composites of Exp. 11-12. Example 11 is for comparison. The MDR cure characteristics were at 1.7 Hz, 1°arc, 180 °C, 30 min, 100 dNm.

10 Levapren® 700 HV is a 70% vinyl acetate/ethylene copolymer available from Bayer AG.

**Table 7 Compounding Recipe**

Experiment	11 (comp.)	12
Therban® A3407	70	
HNBR of Example 3		70
Levapren® 700 HV	30	30
Carbon Black, N 660 Sterling-V	50	50
Maglite® D	3	3
Naugard® 445	1	1
Plasthall® TOTM	5	5
Vulkanox® ZMB-2/C5 (ZMMBI)	0.4	0.4
Zinc Oxide (Kadox® 920) Grade PC 216	3	3
DIAK #7	1.5	1.5
Vulcup 40KE	7.5	7.5

POS 1114 CA

Polymer Composites Properties**Table 8 Summary of Polymer Composites Properties**

Example	11	12
<b>Mooney ML 1+4@100°C</b>		
- Raw Polymer (HNBR)	69	40
- Raw Polymer (Levapren H 700 HV)	27	27
- Polymer composite	66	46
<b>MH (dN.m)</b>	54	48.3
<b>ML (dN.m)</b>	2.4	1.5
<b>Delta Torque (dN.m)</b>	51.5	46.8
<b>t90 (minutes)</b>	5.4	5.6
<b>100% Modulus (Mpa)</b>	10.4	9.9
<b>Ultimate Tensile (Mpa)</b>	24	23.9
<b>Elongation at Break (%)</b>	181	196
<b>Hardness Shore A</b>	71	69
<b>Compression Set in % after 168h @ 150°C</b>	20.76	25.04

5 **Examples 13-16: Compounding and physical testing in blends with a commercially available HNBR with an ACN content of 39 mol%**

Table 9 shows a summary of the properties of polymer composites of Exp. 13-16. Example 13 is for comparison. The MDR cure characteristics were at 1.7 Hz, 1°arc, 180 °C, 30 min, 100 dNm.

10

**Table 9 Compounding Recipe**

Experiment	13	14	15	16
Therban® A3907	100	85	70	50
HNBR of Example 3		15	30	50
Carbon Black, N 660 Sterling-V	50	50	50	50
Maglite® D	3	3	3	3
Naugard® 445	1.1	1.1	1.1	1.1
Vulkanox® ZMB-2/C5 (ZMMBI)	0.4	0.4	0.4	0.4
Zinc Oxide (Kadox® 920)	3	3	3	3
DIAK #7	1.5	1.5	1.5	1.5
Vulcup 40KE	7.5	7.5	7.5	7.5

POS 1114 CA

**Table 10 Summary of Polymer Composites Properties**

Example	13	14	15	16
Mooney ML 1+4@100°C				
- Polymer composite	98	91	81	70
MH (dN.m)	49.3	48.2	46.4	44.9
ML (dN.m)	2.6	2.4	2.1	1.9
Delta Torque (dN.m)	46.7	45.8	44.3	43.1
t90 (minutes)	5.6	5.7	5.9	6.1
100% Modulus (Mpa)	7.45	7.09	7.01	6.51
Ultimate Tensile (Mpa)	25.0	25.5	24.4	24.8
Elongation at Break (%)	235	255	232	261
Hardness Shore A	67	67	66	64
Compression Set in % after 168h @ 150°C	22.1	24.5	23.1	24.5

5 **Examples 17-20: Compounding and physical testing in blends with a commercially available HNBR with an ACN content of 43 mol%**

Table 11 shows a summary of the properties of polymer composites of Exp. 17-20. Example 17 is for comparison. The MDR cure characteristics were at 1.7 Hz, 1°arc, 180 °C, 30 min, 100 dNm.

10

**Table 11 Compounding Recipe**

Experiment	17	18	19	20
Therban® A4307	100	85	70	50
HNBR of Example 3		15	30	50
Carbon Black, N 660 Sterling-V	50	50	50	50
Maglite® D	3	3	3	3
Naugard® 445	1.1	1.1	1.1	1.1
Vulkanox® ZMB-2/C5 (ZMMBI)	0.4	0.4	0.4	0.4
Zinc Oxide (Kadox® 920)	3	3	3	3
DIAC #7	1.5	1.5	1.5	1.5
Vulcup 40KE	7.5	7.5	7.5	7.5



POS 1114 CA

**Table 12 Summary of Polymer Composites Properties**

Example	17	18	19	20
<b>Mooney ML 1+4@100°C</b>				
- Polymer composite	86	85	75	67
MH (dN.m)	43.7	44.2	43.4	42.9
ML (dN.m)	1.7	2.0	1.9	1.7
Delta Torque (dN.m)	42	42.2	41.6	41.2
t90 (minutes)	6.3	6.1	6.1	6.3
100% Modulus (Mpa)	7.75	7.31	6.37	6.86
Ultimate Tensile (Mpa)	25.4	25.7	24.8	24.1
Elongation at Break (%)	248	279	272	260
Hardness Shore A	67	67	66	65
Compression Set in % after 168h @ 150°C	24.3	23.1	23.4	23.4

**Examples 21-22: Compounding and physical testing in a white****5 formulation**

Table 13 shows a summary of the properties of polymer composites of Exp. 21-22. Example 21 is for comparison. The MDR cure characteristics were at 1.7 Hz, 1°arc, 180 °C, 30 min, 100 dNm.

10 Hi-Sil 233 is a precipitated hydrated amorphous silica available from Harwick Standard.

Silane A-174 DLC is a coupling agent available from Harwick Standard.

Satintone SP-33 Kaolin Clay is available from Engelhard.

Aflux 54 is a pentaerythritetetrastearate available from Rhein Chemie.

Saret 517 is a coagent available from Sartomer.

15 TP-95 is a di(butoxy-ethoxy-ethyl) adipate available from Morton International.

Kronos (Titanox) 1000 is a available from Kronos Titan.

TAIC-DLC-A is a triallyl isocyanurate.

POS 1114 CA

**Table 13 Compounding Recipe**

<b>Experiment</b>	<b>21</b>	<b>22</b>
Therban® A3406	100	
HNBR of Example 4		100
Hi-SIL 233	25	25
Silane A-174 DLC	1.5	1.5
Satintone SP-33 Kaolin Clay	30	30
Aflux 54	2	2
Saret 517	2	2
TP-95	20	
Kronox (Titanox ) 1000	2	2
Maglite® D	5	5
Naugard® 445	1.1	1.1
Stearic Acid Emersol 132 NF	0.5	0.5
Vulkanox® ZMB-2/C5 (ZMMBI)	0.4	0.4
Zinc Oxide (Kadox® 920)	5	5
TAIC-DLC-A	5.12	5.12
Vulcup 40KE	10	11

**Table 14 Summary of Polymer Composites Properties**

<b>Example</b>	<b>21</b>	<b>22</b>
<b>Mooney ML 1+4@100°C</b>		
- Polymer composite	44.7	49.7
MH (dN.m)	55.4	86
ML (dN.m)	1.6	.6
Delta Torque (dN.m)	53.7	84.4
t90 (minutes)	4.6	4.6
<b>Stress-Strain (unaged)</b>		
100% Modulus (Mpa)	6.6	13
Ultimate Tensile (Mpa)	14.4	16.1
Elongation at Break (%)	222	132
Hardness Shore A	70	80
<b>Stress-Strain (Aged @ 150°C 168h, hot air)</b>		
100% Modulus (Mpa)	13.4	20
Ultimate Tensile (Mpa)	19.5	21.3
Elongation at Break (%)	173	106
Hardness Shore A	82	83
Change in stress @ 100 (%)	104	54
Chg. Ulti. T ns. (%)	35	32
Chg. El ng. Brk (%)	-22	-20
Chg. Hard. Sh r A (pts)	12	3

POS 1114 CA

From Table 14, it is clear that when compounded to the same compound Moon y Viscosity, the Low Mooney HNBR used in composite 22 can be used without plasticizer. This result in equal processing and improved unaged physical properties.

- 5 The lower plasticizer level leads to improved Compressive Stress Relaxation (CSR) which translate to and improved retention of Initial Force as shown in Figure 1: "Compressive Stress Relaxation 25% Compressive Strain, 150°C".

POS 1114 CA

## Claims

1. A polymer composite comprising at least one, optionally hydrogenated, nitrile rubber polymer having a Mooney viscosity (ML 1+4 @ 100°C) in the range of from 50-30, at least one filler and optionally at least one cross-linking agent.
2. A polymer composite according to claim 1 wherein the raw polymer Mooney viscosity (ML 1+4 @ 100°C) is below 45.
3. A polymer composite according to claim 1 wherein the raw polymer Mooney viscosity (ML 1+4 @ 100°C) is below 40.
4. A polymer composite according to any of claims 1-3 wherein the polymer composite comprises a peroxide or sulfur curing system.
5. A process for preparing a polymer composite according to any of claims 1-4 wherein at least one, optionally hydrogenated, nitrile rubber polymer having a Mooney viscosity (ML 1+4 @ 100°C) in the range of from 50-30, at least one filler and optionally at least one cross-linking agent are mixed.
6. A process for the manufacture of a shaped article comprising the step of injection molding a polymer composite comprising at least one, optionally hydrogenated, nitrile rubber polymer having a Mooney viscosity (ML 1+4 @ 100°C) in the range of from 50-30, at least one filler and at least one cross-linking agent.
7. A process according to claim 6, wherein the shaped article is seal, hose, bearing pad, stator, well head seal, valve plate, cable sheathing, wheel roller, belts, in place gaskets or pipe seal.

POS 1114 CA

Figure 1

